

## PRODUCT DATA SHEET

# Sika® Ucrete® RG

(formerly Ucrete® RG)

Hygienic, heavy-duty polyurethane render and coving mortar

### DESCRIPTION

Sika® Ucrete® RG is a heavy-duty polyurethane render and coving mortar. It has very good resistance to aggressive chemicals, heavy abrasion and temperatures up to +120 °C.

### USES

Sika® Ucrete® RG is used as a render and mortar for Sika® Ucrete® flooring systems.

Sika® Ucrete® RG is used within wet and dry process areas including the following application areas:

- Food and beverage facilities
- Pharmaceutical facilities
- Chemical and processing facilities
- Manufacturing facilities and workshops
- Bunding areas
- Plinths
- Drainage channels
- Tank bases
- Sumps
- Effluent storage pits
- Coving and skirting

Please note:

- The Product may only be used by experienced professionals.

### FEATURES

- Expert installation by fully trained and licensed applicators
- Resistant to bacterial or mould growth
- Suitable for application on to 7-day-old concrete and 3-day-old polymer screed
- Very good resistance to a wide range of chemicals
- Very good mechanical resistance
- Impermeable to liquids
- Non-tainting from the end of mixing
- Low VOC emissions
- Thermal expansion properties similar to concrete

### CERTIFICATES AND TEST REPORTS

- Food and Beverage Facilities Suitability, Sika® Ucrete®, HACCP, Test Report No. I-PE-769-SA-2-RG-06b
- Halal Certification Europe (HCE), Sika® Ucrete®, WHFC, Certificate No. 21453-2/1/1/Y1
- Indoor Air Comfort Gold EN 16516, Sika® Ucrete®, eurofins, Certificate No. IACG-321-01-01-2023

### PRODUCT INFORMATION

<b>Composition</b>	Water-based polyurethane cement hybrid	
<b>Packaging</b>	Refer to the current price list for available packaging variations.	
<b>Colour</b>	Cured colour	Red, Orange, Yellow, Bright Yellow, Cream, Grey, Light Grey, Green, Light Green, Green/ Brown, Blue.
<b>Shelf life</b>	Always refer to the best-before date of the individual packaging.	
<b>Storage conditions</b>	The Product must be stored in original, unopened and undamaged sealed	

#### PRODUCT DATA SHEET

Sika® Ucrete® RG

November 2024, Version 03.01

02081400000002014

packaging in dry conditions at temperatures between +5 °C and +30 °C. Always refer to the packaging.  
Refer to the current Safety Data Sheet for information on safe handling and storage.

<b>Density</b>	Mixed Product	~2.09 kg/l	(EN ISO 2811-1)
----------------	---------------	------------	-----------------

## TECHNICAL INFORMATION

<b>Abrasion resistance</b>	Cured 20 days at +23 °C	126 mg	(EN ISO 5470-1)
<b>Compressive strength</b>	Cured 28 days at +23 °C	52 N/mm <sup>2</sup>	(EN 13892-2)
<b>Flexural-strength</b>	Cured 28 days at +23 °C	15 N/mm <sup>2</sup>	(EN 13892-2)
<b>Tensile strength</b>	Cured for 28 days at +20 °C	7 MPa	(BS 6319-7)
<b>Tensile adhesion strength</b>	> 2.0 N/mm <sup>2</sup> (concrete failure)		(EN 1542)
<b>Reaction to fire</b>	Class B <sub>fl</sub> -s1		(EN 13501-1)
<b>Chemical resistance</b>	Laboratory-defined resistance to many individual chemicals. Before proceeding, contact Sika Technical Service for specific information.		
<b>Service temperature</b>	Maximum	+120 °C	

## APPLICATION INFORMATION


Consumption	Layer	Product	Consumption
	Primer	Sika® Ucrete® PRG	0.15–0.2 kg/m <sup>2</sup>
	Wearing layer	Sika® Ucrete® RG	8–9 kg/m <sup>2</sup> for 4 mm 12–13 kg/m <sup>2</sup> for 6 mm 18–20 kg/m <sup>2</sup> for 9 mm

Note: Consumption data is theoretical and does not allow for any additional material due to surface porosity, surface profile, variations in level, wastage or any other variations. Apply the Product to a test area to calculate the exact consumption for the specific substrate conditions and proposed application equipment.

<b>Layer thickness</b>	~4–9 mm	
<b>Material temperature</b>	Maximum	+22 °C
	Minimum	+15 °C
<b>Ambient air temperature</b>	Maximum	+30 °C
	Minimum	+5 °C
<b>Substrate temperature</b>	Maximum	+30 °C
	Minimum	+5 °C
<b>Curing time</b>	<b>Substrate temperature</b>	<b>Return to traffic</b>
	+8 °C	16–24 hours

Note: Times are approximate and will be affected by changing ambient and substrate conditions.

## SYSTEM INFORMATION

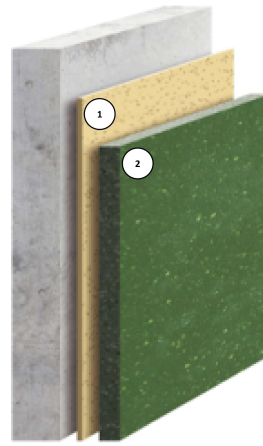

	Layer	Product
1.	Primer	Sika® Ucrete® PRG
2.	Wearing layer	Sika® Ucrete® RG

## BASIS OF PRODUCT DATA

All technical data stated in this Data Sheet are based on laboratory tests. Actual measured data may vary due to circumstances beyond our control.

## SPECIFICATION INFORMATION

Select from the following specification clauses as required:

- A 4 mm Sika® Ucrete® RG floor is fully resistant to high temperature spillage and discharge up to +70 °C. Suitable for freezer temperatures down to -15 °C.
- A 6 mm Sika® Ucrete® RG floor is fully resistant to liquid spillage and discharge up to +80 °C and can be lightly steam-cleaned. Suitable for freezer temperatures down to -25 °C.
- A 9 mm Sika® Ucrete® RG floor is fully resistant to high temperature spillage and discharge up to +120 °C and is fully steam-cleanable. Suitable for freezer temperatures down to -40 °C.

## ECOLOGY, HEALTH AND SAFETY

User must read the most recent corresponding Safety Data Sheets (SDS) before using any products. The SDS provides information and advice on the safe handling, storage and disposal of chemical products and contains physical, ecological, toxicological and other safety-related data.

## APPLICATION INSTRUCTIONS

### SUBSTRATE PREPARATION

#### IMPORTANT

#### Reduced service life due to incorrect treatment of cracks

The incorrect assessment and treatment of cracks may lead to a reduced service life and reflective cracking.

1. For static cracks, ensure the width is suitable for overcoating with Sika® Ucrete® RG.
2. For dynamic cracks, ensure the movement is within the movement capacity of Sika® Ucrete® RG.

#### TREATMENT OF JOINTS AND CRACKS

Construction joints and existing static surface cracks in substrate require pre-treating before full layer application. Use Sikadur® or Sikafloor® resins.

The Product can be applied on green or damp concrete with no standing water. Allow for at least 3 days for early concrete shrinkage to occur to prevent shrinkage cracks from appearing on the wearing surface.

Cementitious substrates must be structurally sound and of sufficient compressive strength (minimum 30 N/mm<sup>2</sup>) with a minimum tensile strength of 1.5 N/mm<sup>2</sup>.

Substrates must be clean, dry and free of contaminants such as dirt, oil, grease, coatings, laitance, surface treatments and loose friable material.

#### APPLICATION

Application must be undertaken by a fully trained and licensed Sika® Ucrete® applicator.

## LOCAL RESTRICTIONS

Note that as a result of specific local regulations the declared data and recommended uses for this product may vary from country to country. Consult the local Product Data Sheet for exact product data and uses.

## LEGAL NOTES

The information, and, in particular, the recommendations relating to the application and end-use of Sika products, are given in good faith based on Sika's current knowledge and experience of the products when properly stored, handled and applied under normal conditions in accordance with Sika's recommendations. In practice, the differences in materials, substrates and actual site conditions are such that no warranty in respect of merchantability or of fitness for a particular purpose, nor any liability arising out of any legal relationship whatsoever, can be inferred either from this information, or from any written recommendations, or from any other advice offered. The user of the product must test the product's suitability for the intended application and purpose. Sika reserves the right to change the properties of its products. The proprietary rights of third parties must be observed. All orders are accepted subject to our current terms of sale and delivery. Users must always refer to the most recent issue of the local Product Data Sheet for the product concerned, copies of which will be supplied on request.

**Sika (Cambodia) Ltd.**

Legacy Business Center, Building #29  
street 245  
Sangkat Tuol Tom Poug 2, Khan  
Chamkarmorn  
12308, Phnom Penh, Cambodia  
Tel: +855 23 901 450

**PRODUCT DATA SHEET**

Sika® Ucrete® RG  
November 2024, Version 03.01  
02081400000002014

